

IOT Cloud Based Air Quality Monitoring Using Mobile Application

¹Vrushali Kanawade, ²KomalShantaramNewase,
³Pooja Chandrakant Pawar, ⁴Neha Suresh Mandadkar, ⁵Jaivardhan Singh Shekhawat

^{1, 2, 3, 4}Department of Computer Engineering,
RajgadDyanpeeth Technical Campus, Pune University,
Dhangawdi Pune- 412205 ,Maharashtra India

⁵ Pursuing B.Tech.(CSE), Government Engineering College, Bikaner

jvss1996@gmail.com

ABSTRACT :

Air contamination is the presentation of chemicals, particulate matter (PM), or organic materials that cause hurt or inconvenience to people and other living beings, or cause harm to the common habitat. Various air pollutant gases sensor such as CO₂, CO, NO₂, and SO₂ PM₁₀ sensors are been used to sense the gases of environment. We propose another strategy to actualize the air quality observing framework in view of best in class Internet-of-Things (IoT) procedures. The system will collect the data from various pollutant sensor and transfer it to mobile application via a IOT cloud. Mobile applications graphical user interface (GUI) will help user for easy access of monitoring gas pollutant and controlling them.

KEYWORDS : Raspberry pi ,sensor, Android,wifi

1. INTRODUCTION

Presently days, there has been an expanding number of common fiascos, for example, substantial rainstorms, storms, a dangerous atmospheric deviation and so on. These cause rising the grouping of nursery gasses in the world's troposphere locale. The level of nursery gasses conveys extreme dangers to man's life and results in the uncommon increment in the quantity of instances of lung tumor, asthma, coronary conduit disease, pneumonia, perpetual bronchitis, and other aspiratory contamination, and so on. The majority of the created nations have been creating air quality and climate (temperature and mugginess) checking stations in the populated zones or outside the city for keeping the impacts of air quality. A large portion of these air quality observing stations have been utilizing primitive techniques for checking air quality. We require a far reaching approach for the constant checking of air quality to diminish

the effects of environmental change. As of late, savvy sensor-actuator systems have taken in a dynamic part in the augmentation of instruments and we have as of late set out on utilizing keen sensors

and guidelines for the estimation of air quality. The earth observing frameworks mostly comprise of two sections, for example, checking framework, keen gadgets (android telephone). A checking procedure of natural parameters, for example, temperature, mugginess, O₃, CO, NO₂, and SO₂ was accounted for. The checking processor depends on a sensor cluster. This task likewise clarified methods for diminishing the force utilization in the sensor and system. Chen et al. built up an advanced mobile phone based application for graphical client cooperation and showing status of the atmosphere. Extend likewise proposed a solitary coordinated remote gadget for observing the status of sensors.

Wifi module is utilized as a part of the improvement of framework. The Wifi module with WSN is given the data in the area in the remote regions and they concentrated on force utilization, versatile correspondence. The force lessening strategy hub and correspondence level are investigated by giving low voltage to the framework. The framework is appropriate for national air checking systems, modern contamination observing, roadside air observing, natural effect appraisals, stadium contamination checking, and so on. Remote observing spreads an extensive variety of utilizations where remote frameworks can supplement wired frameworks by lessening wiring costs and permitting new sorts of estimation applications.

Remote observing applications include:

- Environmental observing of air, water, and soil
- Industrial machine learning
- Structural observing for structures and scaffold

2. LITERATURE REVIEW

The looking for the ideal answers for generation arranging, which minimize contamination impacts

They incorporated three central modules (i.e factual demonstrating module, estimation administration module and advancement module) with a specific end goal to acquire a product engineering that is anything but difficult to control and kept up. The module intended for demonstrating stage can help the end client in tentatively deciding the parameters of the earth contamination. Additionally a logistic module gives reports to checking the contamination level and the commitment of each particular thing of gear to the contamination level. The product framework, called PoLogCem, is exceptionally outlined with a specific end goal to filter the contamination action particular for bond plants and to discover logistical arrangements with the motivation behind contamination control in

the concrete industry. In 2012, Amnesh Goel et al proposed a remote sensor system to screen air contamination levels of different toxins because of environment changes. A remote system is includes of extensive number of sensors hubs. This framework proposes a strategy which essentially concentrates on longer manage day and age of sensor system by adequately overseeing vitality in sensor system, adequately handling of gathered data and less overhead in exchanging data between different sensor hubs. In 2011, Wenhui Wang, et al. keeping in mind the end goal to consent to prerequisites of oil and gas industry, an air quality observing framework was proposed in view of ZigBee remote detecting innovation. It utilizes ZigBee remote system to send results to the observing focus so that, on the off chance that some irregular circumstances happens, a brisk cautioning will be produced to remind staff to take compelling measures to avert significant mishaps and secure human lives in industry.

Kavi K. Khedo et al in 2010 proposed a creative framework named Wireless Sensor Network Air Pollution Monitoring Framework (WAPMS) to screen air contamination in Mauritius using remote sensors sent in immense numbers around the island. To enhance the proficiency of WAPMS, they have composed and actualized another information collection calculation named Recursive Converging Quartile (RCQ). The calculation is utilized to consolidation information to take out copies, sift through invalid readings and abridge them into a less complex structure which essentially lessen the measure of information to be transmitted to the sink and subsequently sparing vitality. For better power administration they utilized a progressive steering convention as a part of WAPMS and created the bits to rest amid inactive time. D A Jadhav in 2013 proposed that A Zigbee Based Platforms Monitoring Environmental Parameters have been designed and developed. The developed system is based on an ARM controller. In,

an outside WSN based air quality checking framework (WSNAQMS) for modern and urban ranges was proposed. The sensor hub comprises of an arrangement of gas sensors (O₃, CO and NO₂) and a ZigBee remote correspondence join in light of the Libelium's Information are transferred to the focal server through the ZigBee correspondence join. Approved air contamination data is accessible to general society through Email, SMS and modified Web App. This system is guaranteed to be basic and reusable in different applications. Likewise the disappointment sensor hubs can be identified efficiently and the vitality utilization of every sensor hub is minimized. Additionally, a straightforward Clustering Protocol of Air Sensor (CPAS) system was proposed, which ended up being efficient (in recreation) as far as system vitality utilization, system lifetime, and the information correspondence rate. The QoSs of the system, for example, deferral, precision and unwavering quality (adaptation to internal failure) were additionally considered. In, a WSN based indoor air contamination checking framework was displayed. The centers were the force utilization on sensor, sensor hub and system levels. A few procedures that significantly enhanced the lifetime (up to 3 years) of the observing framework have been proposed and reproduced. The sensor hub furnishes with a few sensors (accelerometer, temperature and relative stickiness sensors, CO, VOCs and movement sensors), a ZigBee correspondence join and a battery. In the reproduction, 36 sensor hubs were spot in the first floor of a 4-story building. Information procured by the sensor hubs were accessible to the analysts as it were.

3. CONCENTRATION OF GASES IN ATMOSPHERE AND THERE EFFECTS


Carbon monoxide:

Carbon monoxide, CO is framed when burning of carbon based materials take put and there is insufficient oxygen to make

carbon dioxide. It is a result of defective burning of hydrocarbon powers, (for example, oil, gas, normal gas, and coal) and is quite often shaped to some degree when something is scorched on the grounds that smoldering anything never brings about immaculate ignition. On a modern scale be that as it may, carbon monoxide is shaped in a totally distinctive response, known as steam reconstruction. In this procedure methane gas (additionally known as regular gas) is consolidated with steam (gas stage water) at high temperature over an impetus to shape hydrogen gas and carbon monoxide. CO is minimal lighter than air and is effectively mixed with it. Its solvency in water is minimal more prominent than that of air. CO makes a dangerous gas blend with air at a substance of 12-75 % Carbon monoxide is risky in light of the fact that it represses the blood's capacity to convey oxygen to imperative organs, for example, the heart and cerebrum. Breathed in CO consolidates with the oxygen conveying hemoglobin of the blood and structures carboxylhemoglobin (Cob) which is unusable for transporting oxygen.

Sulphur dioxide:

Sulphur dioxide is delivered when powers containing sulphur are smouldered and when minerals of Copper (Cu), Lead (Pb) and Zinc (Zn) are purified. They influence human wellbeing through the respiratory framework bringing about reversible bronchial tightening at fixations as low as 1.6 ppm. Asthma patients start to feel the breathing issues at a convergence of 0.5 ppm. Changeless lung harm at convergences of 20.0 ppm. SO₂ has a sharp bothering smell at around 3.0 ppm which is the smell „detection limit“. Sulfur dioxide experience several complex ventures of concoction responses before they turn into the acids found in corrosive downpour. Sulfur dioxide responds with dampness found in the air. When this happens, sulfate dioxide promptly oxidizes to frame a sulfite particle.



A while later, it gets to be sulfuric corrosive when it joins with hydrogen molecules noticeable all around
 $SO_3(g) + H_2O(l) \rightarrow H_2SO_4(aq)$
 This response happens rapidly, consequently the development of sulphur dioxide in the air is accepted to lead this sort of oxidation to end up sulfuric acid.

4. AIR QUALITY STANDARDS

Pollutants are emitted by human activities and natural sources. Hundreds of hazardous pollutants in our living environment have been identified [22]. However, six of these pollutants are well studied and ubiquitous in our daily lives, including carbon monoxide (CO), nitrogen dioxide (NO₂), ground level ozone (O₃), sulfur dioxide (SO₂), particulate matter (PM) and lead (Pb) [23]. The health effects (see Table 2) and environmental effects caused by these pollutants can be found in [24–29]

| POLLUTANT | HEALTH EFFECTS |
|-------------------------------------|--|
| Carbon Monoxide (CO) | Lessening oxygen limit of the platelets leads to lessening oxygen conveyance to the body's organs furthermore, tissues. To a great degree abnormal state can bring about death |
| Nitrogen Dioxide (NO ₂) | High hazard element of emphysema, asthma and bronchitis maladies. Exasperate existing heart malady and increment sudden passing. |
| Ozone (O ₃) | trigger mid-section torment, hacking, throat bothering furthermore, clog. Compound bronchitis, emphysema furthermore, asthma |

| | |
|--|--|
| Particulate Matter (PM _{2.5} & PM ₁₀) | Cause unexpected passing in individuals with heart and lung sicknesses. Exasperate asthma, diminish lung capacity and increment respiratory side effects like hacking and trouble relaxing |
|--|--|

Governments and associations have put control limits on these toxins to diminish the dangers. The United States Environmental Protection Agency (EPA), the World Health Organization (WHO), the European Commission (EC), the Chinese Ministry of Environmental Protection (MEP) what's more, the Environmental Protecting Department (EPD) of Hong Kong have proclaimed diverse standard limits for these poisons (see Table 3). With a specific end goal to help general society comprehend the present air quality effectively, the administration and association organizations presented a marker called Air Quality Index (AQI). AQI measures the "condition or condition of every with respect to the necessities of one or more biotic animal categories and/or to any human need or reason" [30]. In a word, it tells the general population how "great" the present air quality is or the conjecture air quality will be. Distinctive offices may utilize diverse air quality files [31–34]. To delineate the idea of AQI, an AQI case presented by the Environmental Protection Office (EPD) of Hong Kong [35] called Air Quality Health Index (AQHI) framework is given. The AQHI framework gives a superior comprehension on wellbeing dangers to the general population and recommend subtle element preparatory activities concerning each AHQI level.

5. PROPOSED SYSTEM ARCHITECTURE

In proposed model a Wi-Fi based system that let users monitor real time information of the sensor devices through an android apps. Our model uses Gas sensors to check for the air quality level indicated in atmosphere, Gas sensors used in system are CO₂ sensor, CO sensor, NO₂ sensor, SO₂ sensor to measure the air level of different gases in. Temperature sensor is monitor the temperature in the climate as well as the humidity sensor is used to measure the humidity in weather. Also monitor the real time value through an android based mobile apps. The system is connected to this application using internet connectivity through the Wi-Fi for communication.


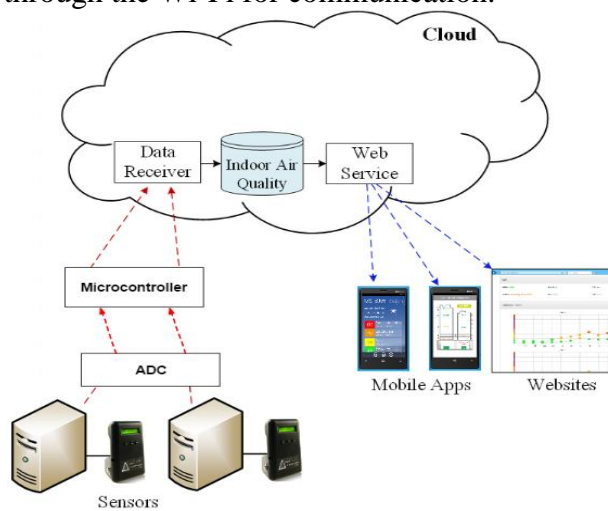



Fig.5.1. Architecture of proposed system

6. RESULT

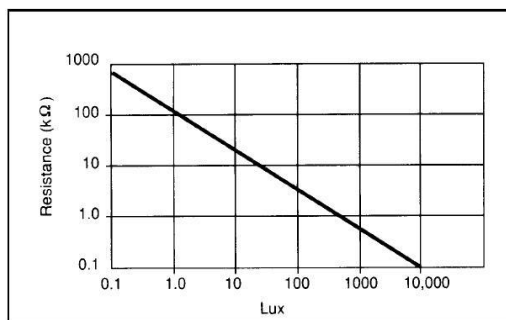

This system is controlled with carbon dioxide sensors sulphur-dioxidesensor,temperature sensor

,humiditysensor. System will monitor all the environment parameter in real time after equal interval of time. Parameter will be mapped with threshold parameter and result will be generated.

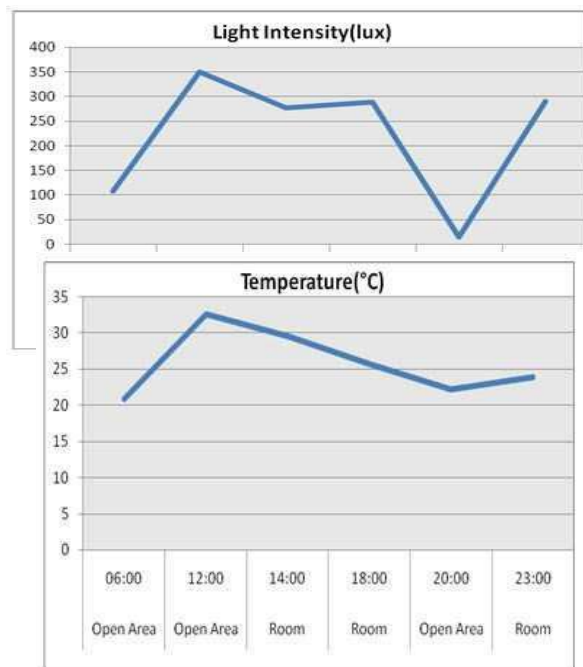

We have implemented this project model on a prototype board to demonstrate its working. We tested its accuracy at various places and noted the values at outdoors and indoors. Shows the place time and corresponding readings for a normal day. For an open area we chose an open garden for noting down the readings and for a closed area we chose a room. Graphs are also plotted for the corresponding reading for better understanding of the reader. This project work is successfully implemented and the results obtained are accurate with a simple user interface. Since, LM35 is a pre-calibrated IC, it shows temperature with

notable precision, and since there are some uncertainties about lumen scale the LDR shows some (+10%) error in light intensity values. Given below are some pictures of real-time working model of our project on bread-board to demonstrate its effective implementation. Shows measurement of light intensity in lux and in it is observed that light intensity decreases when we cover LDR with hand.

7. CONCLUSION

Presently days, there has been an expanding number of characteristic debacles, for example, substantial rainstorms, storms, a dangerous atmospheric devotion and so on. These cause rising the grouping of nursery gasses in the world's troposphere area. The level of nursery gasses conveys extreme dangers to man's life and results in the uncommon increment in the quantity of instances of lung growth, asthma, coronary vein disease, pneumonia, endless bronchitis, and other aspiratory contamination, and so forth. The greater part of the created nations have been creating air quality and climate (temperature and dampness) checking stations in the populated regions or outside the city for keeping the impacts of air quality. The majority of these air quality observing stations have been utilizing primitive strategies for checking air quality. We require a far reaching approach for the constant checking of air quality to lessen the effects of environmental change.

As of late, brilliant sensor-actuator systems have taken in a dynamic part in the expansion of instruments and we have as of late set out on utilizing keen sensors and models for the estimation of air quality. The earth observing frameworks chiefly comprise of two sections, for example, checking framework, shrewd gadgets

(android telephone). An observing procedure of ecological parameters, for example, temperature, mugginess, O₃, CO, NO₂, and SO₂ was accounted for. The checking processor depends on a sensor cluster. This venture additionally clarified methods for diminishing the force utilization in the sensor and system.

In this paper, we have exhibited an air quality checking framework in light of the ARM7 microcontroller. The model framework comprises of the air quality checking station, correspondence connections, and android versatile. We have built up the Wi-Fi module based remote connection with Android portable. The continuous information are shown in an android applications in content arrangement. Electrochemical and infrared sensors were utilized to quantify the groupings of CO, CO₂, SO₂ and NO₂ and additionally temperature sensor for measure temperature and mugginess sensor for measure the moistness. These sensors devour little power and are extremely precise. A MCU is utilized to control every one of the procedures on the sensor hub. Pumping gas into the hatchery and watching the estimations taken by the sensor hub. The Wi-Fi module catches the information transmitted by the remote sensor hub and serially advances it to the versatile.

8. REFERENCES

- 1) Mansour, S.; Nasser, N.; Karim, L.; Ali, A. Wireless Sensor Network-based air quality monitoring system. In Proceedings of the 2014 International Conference on Computing, Networking and Communications (ICNC), Honolulu, HI, USA, 3–6 February 2014; pp. 545–550.
- 2) Libelium. LibeliumWasp mote. Available online: http://www.libelium.com/products/wasp_mote/ (accessed on 27 May 2015).
- 3) Jelacic, V.; Magno, M.; Brunelli, D.; Paci, G.; Benini, L. Context-Adaptive

- Multimodal Wireless Sensor Network for Energy-Efficient Gas Monitoring. *IEEE Sens. J.* 2013, 13, 328–338.
- 4) Goel, A., et al. Air Pollution Detection Based on Head Selection Clustering and Average Method from Wireless Sensor Network. in *Advanced Computing & Communication Technologies (ACCT), 2012 Second International Conference on.* 2012.
- 5) IEEE Wang, W., the Research and Implementation in Air Quality Monitoring System Based on Zigbee. *International Conference of Wireless Communication Networking and Mobile Computing*, Sept 2011: p. 1-4
- Khedo, K.K., A Wireless Sensor Network Air Pollution Monitoring System. *International Journal of wireless & Mobile Networks*, May 2010. No. 2(No. 2).
- 6) S. Folea, G. Mois, L. Miclea, and D. Ursutiu, “Battery lifetime testing using Lab VIEW,” in *Proc. 9th Int. Conf. Remote Eng. Virtual Instrum. (REV)*, Jul. 2012, pp. 1–6.
- 7) D. Larios, J. Barbancho, G. Rodríguez, J. Sevillano, F. Molina, and C. León, “Energy efficient wireless sensor network communications based on computational intelligent data fusion for environmental monitoring,” *IET Common.*, vol. 6, no. 14, pp. 2189–2197, Sep. 2012.
- 8) J. Ko, C. Lu, M. B. Srivastava, J. A. Stankovic, A. Terzis, and M. Welsh, “Wireless sensor networks for healthcare,” *Proc. IEEE*, vol. 98, no. 11, pp. 1947–1960, Nov. 2010.
- 9) C. H. See, K. V. Horoshenkov, R. A. Abd-Alhameed, Y. F. Hu, and S. Tait, “A low power wireless sensor network for gully pot monitoring in urban catchments,” *IEEE Sensors J.*, vol. 12, no. 5, pp. 1545–1553, May 2012.
- 10) T. Sanislav and L. Miclea, “An agent-oriented approach for cyberphysical system with dependability features,” in *Proc. IEEE Int. Conf. Autom. Quality Testing Robot. (AQTR)*, May 2012, pp. 356–361.
- 11) F.-J. Wu, Y.-F. Kao, and Y.-C. Tseng, “From wireless sensor networks towards cyber physical systems,” *Pervasive Mobile Comput.*, vol. 7, no. 4, pp. 397–413, 2011.
- 12) S. Tozlu, M. Senel, W. Mao, and A. Keshavarzian, “Wi-Fi enabled sensors for internet of things: A practical approach,” *IEEE Commun. Mag.*, vol. 50, no. 6, pp. 134–143, Jun. 2012.