

“COMPARATIVE EXPERIMENTAL STUDY ON CYLINDRICAL COMPRESSIVE STRENGTH OF CASTED & CORED CYLINDERS OF FLY ASH CONCRETE BY USING NDT”

SHITAL P. SALUNKHE¹

SHITAL M. JADHAV²

^{1,2} Asst. Professor, Shri. Chatrapatti Shivajiraje College of Engineering, Dhangwadi.

shitalpsalunkhe@gmail.com

shital16jadhav@yahoo.co.in

ABSTRACT:—

Nondestructive testing (NDT) has the potential to be a powerful investigative tool due in part to its ability to detect problems without inducing further damage or through those where the concrete surface is slightly damaged to partially destructive tests, such as core tests and pullout and pull off tests, where the surface has to be repaired after the test, but also because it does so with minimal expenditures of time and manpower. The range of properties that can be assessed using nondestructive tests and partially destructive tests is quite large and includes such fundamental parameters as density, elastic modulus and strength as well as surface hardness and surface absorption, reinforcement location, size and distance from the surface. In some cases it is also possible to check the quality of workmanship and structural integrity. In this project work, three grades of fly ash concretes M20, M25 & M30 are used for the testing purpose with the replacement of cement by 10% of fly ash. The tests for compressive strengths of two types of sizes 100 x 200 mm for cored & 150 x 300mm for casted cylinders carried out. The test results are recorded for the 7, 14, 21, & 28 days. The compressive strength & quality of concrete is found by various NDT tests available. Both the results for casted cylinders and cored cylinders are compared and validated with modeling from software ABACUS.

KEYWORDS—Fly ash Concrete, Compressive strength, Cylinders, Abaqus analysis.

I. INTRODUCTION

It is a great deal of the quality assurance and forensic work performed on civil engineering structures revolves around the use of destructive testing techniques.

In the past, NDT has usually been approached in an entirely empirical manner. Typically, this was done by performing large numbers of tests with a particular piece of equipment and then analyzing the results in an attempt to find some pattern that represents the expected damage. There are a number of advantages associated with this approach. It will allow proper correlation of NDT. Such information is essential in establishing acceptable performance of new structures and also gives the rough idea about the concreting..

By combining a laboratory testing program that simulates the strength mechanisms in concrete with nondestructive testing technologies this research will

identify the parameters related with compressive strengths. Knowledge of these key will allow for the selection of appropriate NDT technologies for monitoring changes. This effort will thus provide the groundwork for future research aimed at using nondestructive testing.

Knowledge of the condition of newly constructed structures will provide the quality assurance data necessary to ensure compliance with the performance-based specifications approach currently being adopted. Similarly, the ability to detect, identify and quantify existing damage at an earlier age than conventional techniques will minimize the costs associated with rehabilitation. Finally, a comprehensive NDT based evaluation program will set the stage for a rational framework for actual service life modeling of structures, with an emphasis on providing information for the development of optimum maintenance regimes and rehabilitation techniques.

The tests available for testing concrete range from the completely non-destructive, where there is no damage to the concrete, through those where the concrete surface is slightly damaged, to partially destructive tests, such as core tests and pullout and pull off tests, where the surface has to be repaired after the test. The range of properties that can be assessed using non-destructive tests and partially destructive tests is quite large and includes such fundamental parameters as density, elastic modulus and strength as well as surface hardness and surface absorption, and reinforcement location, size and distance from the surface. In some cases it is also possible to check the quality of workmanship and structural integrity.

The application of NDT techniques to the solution of civil engineering problems has sometimes been disappointing. This has arisen from either using a method which lacked the precision required in a particular structural investigation or by specifying a method that is inappropriate to the problem under consideration. In some cases, these problems could have been avoided by taking expert advice before initiating the survey.

II. MATERIALS

A. Cement:

The cement used in all mixtures was commercially available “Ultra-tech 53 grade Ordinary Portland Cement conforming to IS 12269-1987 was used in this study.

B. Fine aggregate:

Locally available river sand passed through 4.75mm IS sieve as per the IS 383 is used as fine aggregate. The river sand is washed & screened to eliminate deleterious materials.

C. Coarse aggregate:

The both 20mm and 10 mm Coarse aggregate are obtained from a local basalt rock quarry as per the IS 383 is used.

D. Fly ash:

Fly ash is very much similar to volcanic ashes used in production of the earliest known hydraulic cements about 2,300 years ago. Those cements were made near the small Italian town of Pozzuoli - which later gave its name to the term “pozzolan”. A pozzolan is a siliceous or siliceous material which when mixed with lime and water forms a cementitious compound. In this project we used the Class F fly ash generated by the built company Bhigwan.

E. Water:

Water is important ingredient which helps to form the strength giving cement gel & it is looked into very

		Material Results (As per required IS specifications)				
Sr no	Physical properties	Cement	F.A.	C.A.	FLY	Water
1	Specific Gravity	3.15	2.63	2.91	2.23
2	Fineness modulus	2.50	3.06
3	Initial setting time	32 min	143 min
4	Final setting time	395 min	302 min
5	Standard consistency	26%

carefully W/c ratio are mentioned in table no

The all material properties are summarized in table below:-

TABLE 1: Physical properties of Material

III. METHODOLOGY

The mix design is produced for maximum size of aggregate is 20mm conventional aggregate. The variation of strength of hardened concrete using solid wastes as partial replacement of cement by fly ash is studied by casting & cored cylinders. The concrete was prepared in the laboratory using mixer. The cement, fine aggregate and coarse aggregate in dry state and then the desired water quantity is added and the whole concrete is mixed for 5 minutes, the concrete is poured in the required moulds which are closed tightly. The concrete is poured into the moulds in 3 layers by poking with tamping rod for cylinders of 150x300 mm size & also for slabs sizes 500 x 500 x 300 mm is casted for cored cylinders sizes 100 x 200 mm and both Sizes was tested for compression strengths. The cast specimens are removed after 24 hours and cores from slabs are taken after 6 days with the help of coring machine by proper curing of slabs these are immersed in a water tank for curing and testing purpose. After a curing period of 7, 14, 21 and 28 days the specimens are tested for compression

strengths and the results are compared with abacus mathematical modeling results. These results are corrected by correction factor 1.25. [IS: 516 – 1959]

a) Design mix

a concrete mixes of M-20, M-25 & M-30 were used to examine the cylindrical compressive strength of fly ash concrete & were designed as per the 10262:2009. Cement is replaced by 10% of fly ash by weight. Details of the mixes are given in Table 1

TABLE 2:Details of mix proportions

Mix design proportion (By Weight)					
Mix ID	Cement	N.F.A	N.C.A	Water	Fly ash
M-20	0.90	1.86	3.98	0.50	0.10
M-25	0.90	1.65	3.54	0.45	0.10
M-30	0.90	1.57	3.40	0.42	0.10

Targeted compressive strength is also finding by cube casting of sizes 150 x 150 x 300 mm & tested. results are given below. In order that not more than the specified proportion of test results is likely to fall below the characteristic strength, the concrete mix has to be proportioned for higher target mean compressive strength f_{ck} . The margin over characteristic strength is given by the following relation.

$$f'_{ck} = f_{ck} + 1.65 \times s$$




		Compressive strengths N/mm ²		
Sr no	Days	M-20	M-25	M-30
1	7	8.12	12.42	14.02
2	28	27.37	37.27	38.19

IV. RESULTS AND DISCUSSIONS

Basically this paper is based on various NDT methods available in our lab. The various NDT test are carried at the end of 7, 14, 21, & 28 days. For cylindrical compressive strength of specimen there are two tests are available in our lab that is Rebound hammer test & compressive testing machine. The all results by these tests are summarised in table




A. Rebound Hammer test:-

The rebound hammer is a surface hardness tester for finding the strength. Here we used Digital rebound hammer which shows the compressive strength on screen & is also suitable for both laboratory and field work. The test surface can be horizontal, vertical or at any angle.

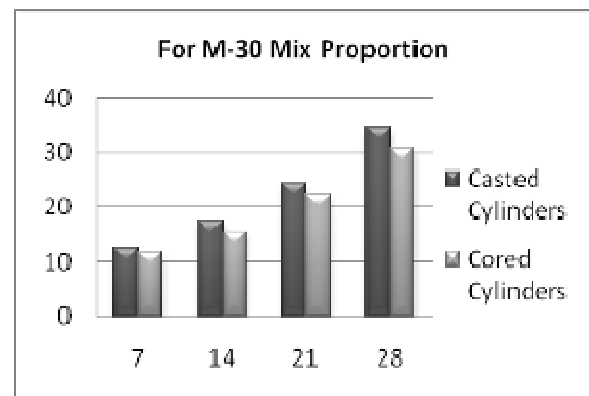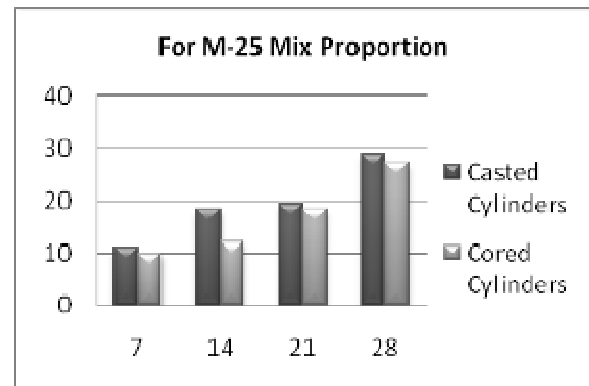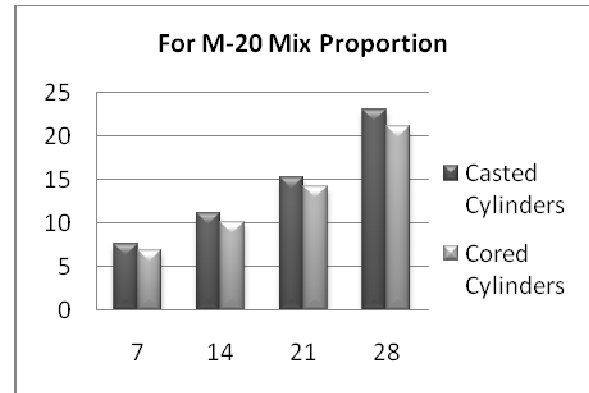

B. compressive testing machine test:-

Compressive strength is the capacity of a material to withstand axially directed pushing forces. When the limit of compressive strength is reached, materials are crushed. The cylindrical concrete specimen is placed on the platform of compression testing machine without any packing between the cube and the steel plates of the testing machine. The load is then applied on a smooth surface on the cube steadily and uniform starting from zero at smooth rate till the cylinders fails.

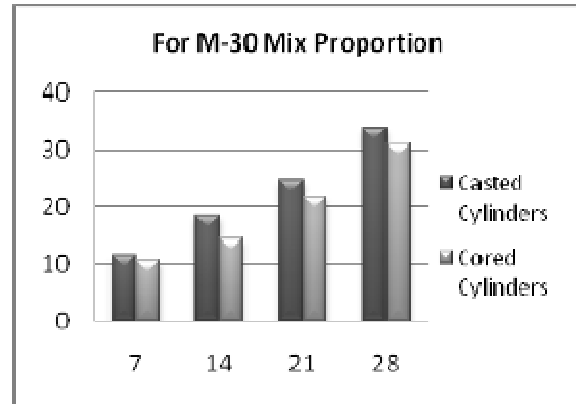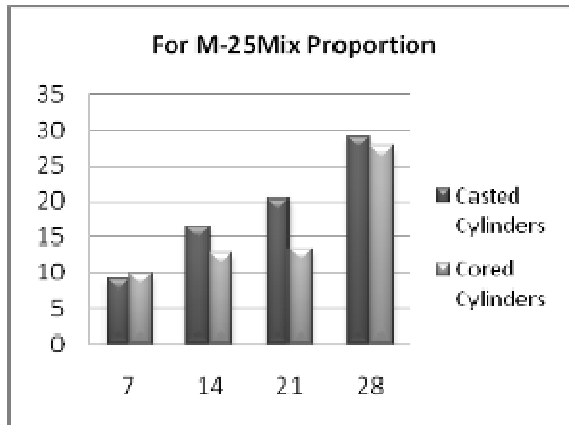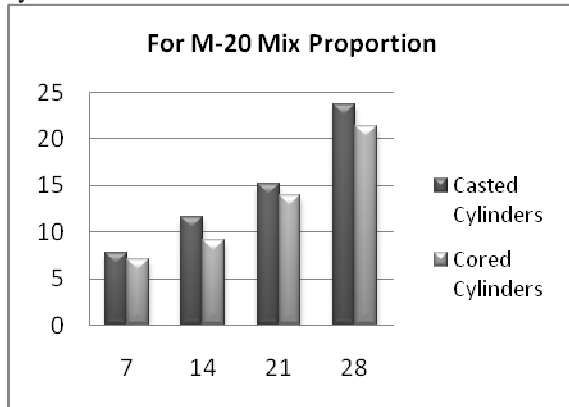

B. USPV Test:-




In this method the ultrasonic pulses generated by electro-acoustical transducer are transmitted through the concrete. When the pulse is induced into the concrete from a transducer, it undergoes multiple reflections at the boundaries of the different material phases within the concrete.



Fig. 1: USPV Machine

Velocity Criteria for Concrete Quality Grading As per Table 2 of IS 13311 (Part1): 1992

Sr. No.	Pulse Velocity by Cross Probing (km/sec)	Concrete Quality Grading
1.	Above 4.5	Excellent
2.	3.5 to 4.5	Good
3.	3.0 to 3.5	Medium
4.	Below 3.0	Doubtful

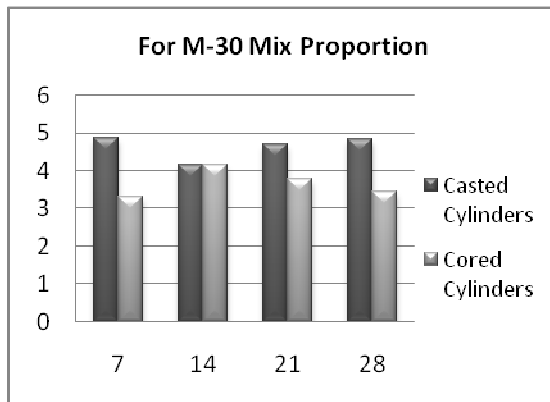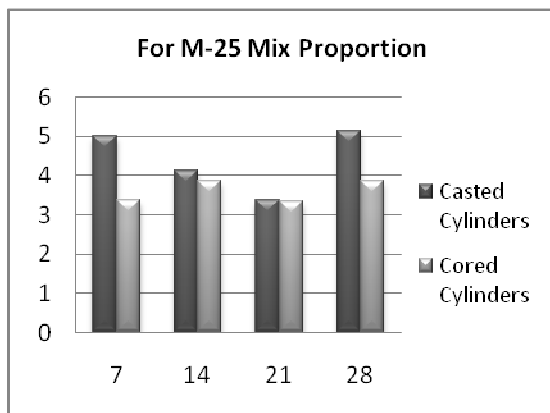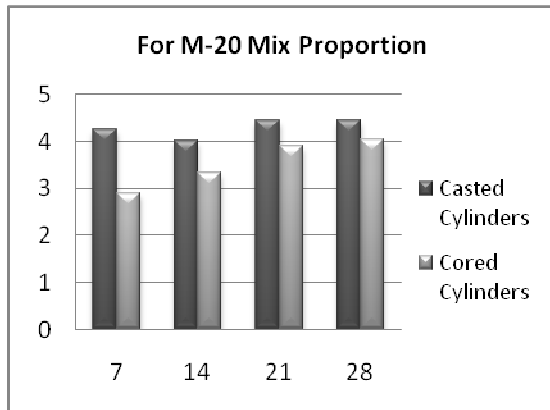

element models, submits Abaqus analyses, monitor and diagnose jobs, and evaluate results.

- Abaqus/Viewer, a subset of Abaqus/CAE that contains only the post processing capabilities of the Visualization module.

During pre-processing user has to work hard while solution step is the turn of computer to do the job. User has to just click on solve icon & enjoy a cup of tea! Internally software carries out matrix formation, inversion, multiplication and solution for unknown e.g. displacement and then find strain and stress for static analysis. Today we are using FEA just because of availability of computers. FEM has been known to mathematicians and engineers right from late 50s but since solving so many equations manually was not possible, in true sense FEA got recognition only after emergence of high capacity computers.

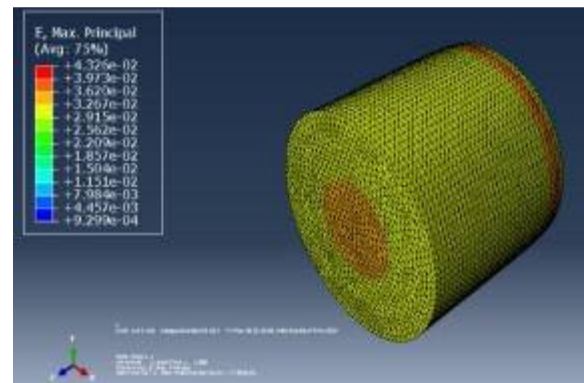


Fig 2: Max strain of Grade M-30

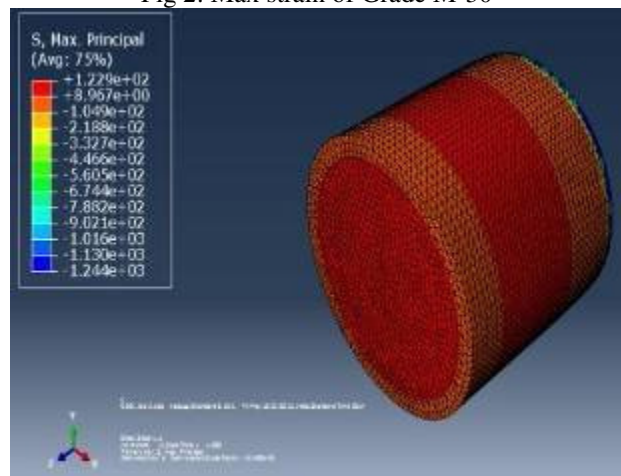


Fig 3: Final model with results Max Stress

ANALYSIS

A. Abaqus software

- The Abaqus finite element system includes
- Abaqus/Standard, a general purpose finite element program.
- Abaqus/Explicit, an explicit dynamics finite element program.
- Abaqus/CAE, an interactive environment used to create finite

V. SOFTWARE RESULTS

By using Abaqus software find out the first maximum principal stress and using normal stress formula evaluate the compressive strength.

I] Compressive strength by software(Example)

Formula,

$$\sigma_n = [(\sigma_x + \sigma_y)/2] + [(\sigma_x - \sigma_y)/2 (\cos 2\theta)]$$

Where,




σ_n – Normal stress

σ_x – Experimental stress in X-direction

σ_y – Experimental stress in Y-direction

Now, consider a casted M-20 grade cylinder for analysis its max stress is 33.66 N/mm²

$$\begin{aligned} \sigma_n &= [(0 + 33.66)/2] + [(0 - 33.66)/2 (\cos 2 \times 30)] \\ &= [16.83] - [(8.415)] \\ &= 8.42 \end{aligned}$$

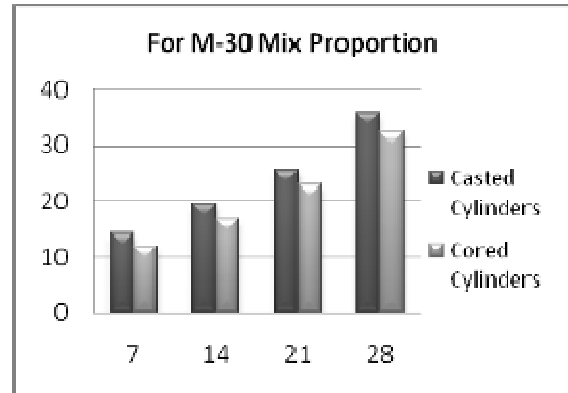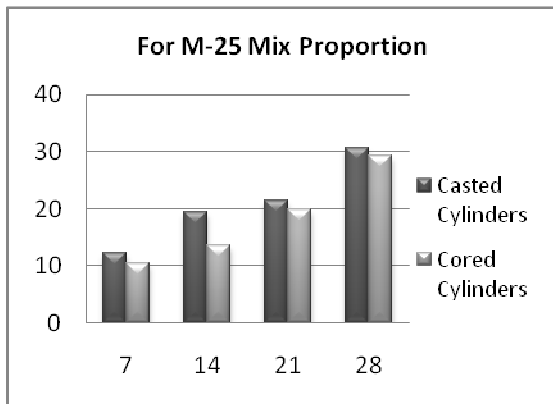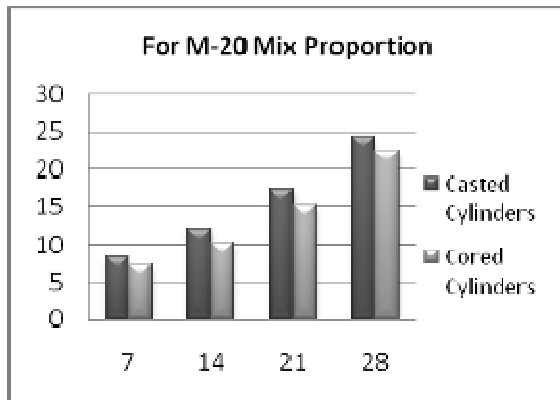

Comparisons of all results:-

TABLE- 3: Test results for Casted cylinders by Abacus Modeling

Sr no	Days	Compressive strength		
		M-20	M-25	M-30
1	7	8.42	12.285	14.33
2	14	12.03	19.453	19.453
3	21	17.405	21.50	25.60
4	28	24.315	30.725	35.825

TABLE- 4: Test results for Cored cylinders by Abacus Modeling

Sr no	Days	Compressive strength		
		M-20	M-25	M-30
1	7	7.313	10.445	12.013
2	14	10.185	13.58	16.713
3	21	15.238	19.845	22.98
4	28	22.458	29.25	32.375

TABLE- 5: Test results for Casted cylinders By RHT

Days	Compressive strength for casted cylinders sizes 150 x 300 mm in N/mm ²		
	For M-20	For M-25	For M-30
7	7.60	9.10	11.35
14	11.10	13.30	17.70
21	15.25	18.35	21.30
28	22.00	27.80	31.65

TABLE- 6: Test results for Cored cylinders By RHT

Days	Compressive strength for cored cylinders sizes 100 x 200 mm in N/mm ²		
	For M-20	For M-25	For M-30
7	6.90	8.75	9.65
14	10.10	12.05	18.45
21	14.15	16.35	19.40
28	21.10	26.30	29.85

TABLE- 7: Test results for Casted cylinders By CTM




Days	Compressive strength for casted cylinders sizes 150 x 300 mm in N/mm ²		
	For M-20	For M-25	For M-30
7	7.77	9.02	11.66
14	11.67	19.453	19.453
21	17.405	21.50	25.60
28	24.315	30.725	35.825

TABLE- 8: Test results for Cored cylinders By CTM

Days	Compressive strength for cored cylinders sizes 100 x 200 mm in N/mm ²		
	For M-20	For M-25	For M-30
7	7.01	9.77	10.66
14	9.12	12.83	14.44
21	13.98	17.33	21.73
28	21.42	27.67	31.09




These tables shows the various results came from NDT test it is clearly shown that the CTM & RHT are both NDT tests are effective in some manner but results came from CTM machine is more similar to results came from ABACUS modeling.

Comparison for Casted cylinders:-

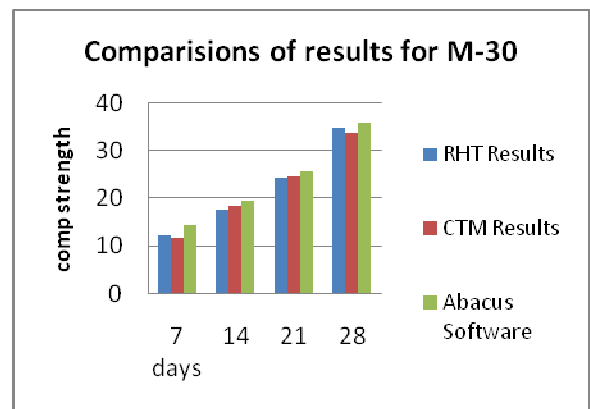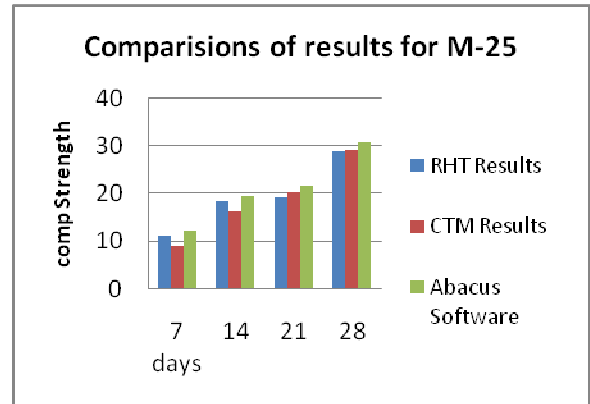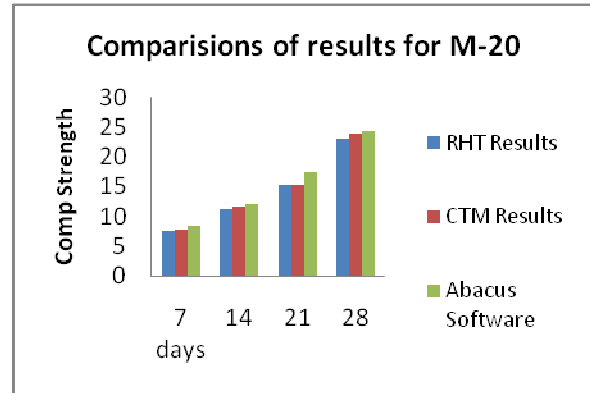

Comparison for Cored Cylinders:-

This shows the strengths variation due to affecting factors in following graphs:-

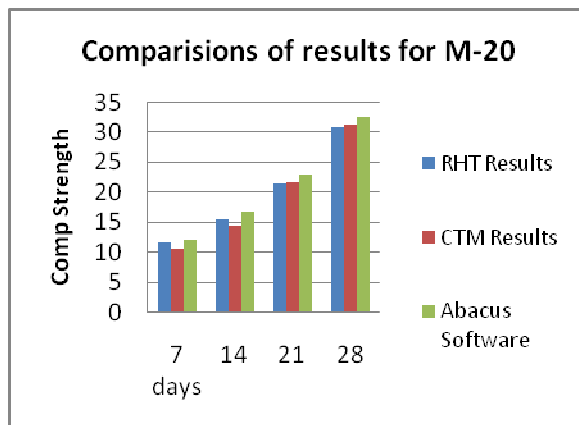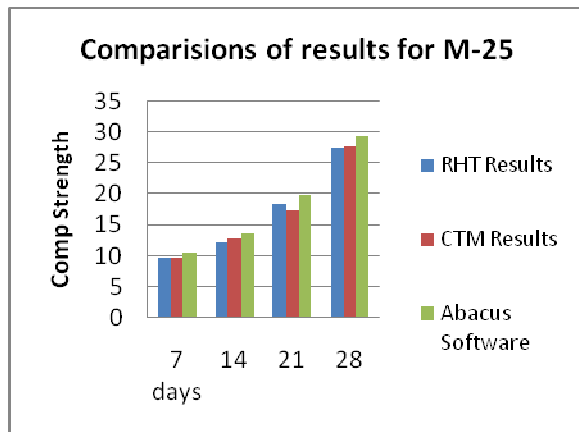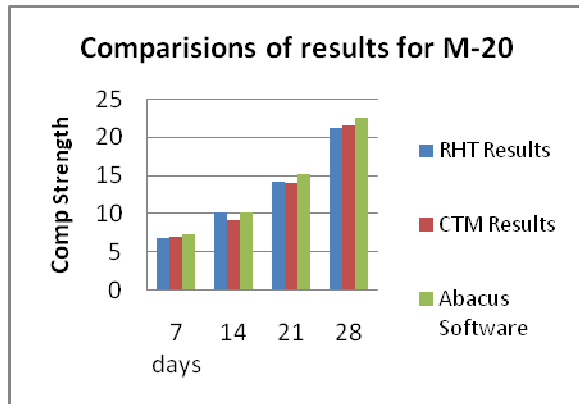

These comparison shows that the compressive strength came from NDT method is less than compressive strength came from software but it reaches up to the optimum level with targeted strength.

VI. CONCLUSIONS

1. From the above study concluded that replacement of cement by 10% fly ash decreases the cylindrical compressive strength of concrete.
2. It also shows that the cored cylinders which sizes by 100 x 200mm gives less compressive strength as compared to casted which sizes by 150 x 300mm cylinders in both the testing .
3. For M-20, M-25, & M-30 grade correction coefficients that is according to cylindrical compressive strength tested by Abacus modeling for casted & cored cylinder is 0.998, 0.968, and 0.999 respectively.
4. For M-20, M-25, & M-30 grade correction coefficients that is according to cylindrical compressive strength tested by CTM for casted & cored cylinder is 0.993, 0.918, and 0.9917 respectively
5. Also by comparing the CTM & Abacus modeling strength we found the correction coefficients near about 1.
6. Cored cylinders gives less compressive strengths due to various affecting factors.
7. From the above study concluded that software compressive strength is greater than experimental compressive strength.

ACKNOWLEDGEMENT

I express my sincere thanks to all those who have helped me directly or indirectly in completing this project.

REFERENCES

1. Advanced NDT methods for the assessment of concrete structures
H. Wiggenhauser Federal Institute for Material Research and Testing (BAM), Berlin, Germany, Concrete Repair, Rehabilitation and Retrofitting II – Alexander et al (eds)© 2009.
2. Correlation between Destructive and Non-Destructive Strengths of Concrete Cubes Using Regression Analysis Hassan R. Hajjeh.
Civil Engineering Department, Faculty of

Engineering Technology

Al-Balqa' Applied University, Amman – Jordan
h_hajjeh@yahoo.com

3. Research Paper FLY ASH CONCRETE: A
TECHNICAL ANALYSIS FOR COMPRESSIVE
STRENGTH Dr S L Pati¹, J N Kale², S Suman³

4. Effects of fly ash fineness on the mechanical
properties of concrete SEMSI YAZICI[□] and
HASAN SAHAN AREL

Department of Civil Engineering, Engineering
Faculty, 35100 Izmir, Turkey

5. Assessing the Relationship between the
Compressive Strength of Concrete Cores and Molded
Specimens Ali ERGÜN¹, Gökhan KÜRKLÜ

Afyon Kocatepe University, Technical Education
Faculty, Construction Department, Afyonkarahisar
03200, Turkey

6. COMPARISON OF CORE AND CUBE
COMPRESSIVE STRENGTH OF HARDENED
CONCRETE

M. Yaqub*, University of Engineering and
Technology Taxila, Pakistan M. Anjum Javed,
Concordia University, Canada
31st Conference on
OUR WORLD IN CONCRETE & STRUCTURES:
16 - 17 August 2006, Singapore

7. Research Paper EXPERIMENTAL
INVESTIGATIONS ON PARTIAL
REPLACEMENT OF CEMENT WITH FLY ASH
IN DESIGN MIX CONCRETE

Prof. Jayeshkumar Pitroda¹, Dr. L.B.Zala²,
Dr.F.S.Umrigar

8. Research Investigation 03-038, Research Report
04-005, February, 2004 on Comparison of
Compressive Strengths Using 4x8 vs. 6x12 Cylinders
for Prestress Concrete

9. INVESTIGATION ON FLY ASH AS A
PARTIAL CEMENT REPLACEMENT IN
CONCRETE BY FASEYEMI V.A

TECHNICAL MANAGER, AL ANDALUS
FACTORY FOR CEMENT PRODUCTS, DOHA –
QATAR.

10. Journal of Environmental Research and
Development Vol. 5 No. 1, July-September 2010
STUDY ON FLYASH CONCRETE USING SEM
ANALYSIS

Received October 21, 2009 Accepted July 24, 2010

11. International Journal of Scientific & Engineering
Research, Volume 4, Issue 1, January-2013 ISSN
2229-5518 IJSER © 2013

Experimental study on strength characteristics on
M25 concrete with partial replacement of cement
with fly ash and coarse aggregate with coconut shell
R. NAGALAKSHMI

12. COMPRESSIVE STRENGTH OF NORMAL
STRENGTH CONCRETE (NSC) USING BRITISH
STANDARD, EURO CODE AND NON-
DESTRUCTIVE TEST APPROACHES

TANG RAN AN,

13. Effect of fine aggregate replacement with Class F
fly ash on the mechanical properties of concrete
Rafat Siddique.