

ASSESSMENT OF GROUNDWATER QUALITY AROUND SOLID WASTE LANDFILL AREA - A CASE STUDY

¹SUJATA BADAGI, ²PRASANNA NADAGOUDA

^{1,2}Assistant Professor, Civil Engineering Department,
TCE Gadag 582101, Karnataka, India²

sujata.badagi@yahoo.com, prnadagouda@gmail.com

ABSTRACT : Physical, chemical and bacteriological analyses of water samples from seven bore wells located around landfill site at Turmuri, Belgaum was carried out to ascertain the magnitude of dumpsite pollution on groundwater quality. During the study period, 7 bore wells were selected around the landfill area at a distance of 500, 750 and 1000m. The parameters analyzed during the study period were pH, total dissolved solids (TDS), Total Hardness, Nitrate, Most Probable Number (MPN) and heavy metal such as Lead using standard laboratory procedures. The pH ranged from 6.01 to 7.3 indicating acidic in nature in the month of Feb - March, the three bore wells near landfill i.e. within 500 m. Concentrations of Hardness, TDS, Nitrate and MPN ranged from 0 to 80 mg/L, 49 to 190 mg/L, 4 to 79.89 mg/L and >1600/100ml respectively. The analysis was done for four months from Feb – May. The results showed that within 500 m bore wells were contaminated by E-Coli bacteria, also nitrate concentration is above the permissible level described by WHO and Bureau of Indian Standards for drinking water and pH were acidic in nature. The polluted water requires certain levels of treatment before use. Public enlightenment on waste sorting, adoption of clean technology, using climate change mitigation strategies and the use of sanitary landfill to prevent further contamination of ground water flow are recommended.

KEY WORDS : Groundwater, Landfill, Total Dissolved Solids (TDS), Hardness, Most Probable Number (MPN).

1. Introduction

Groundwater is a globally important and valuable renewable resource for human life and economic development. It constitutes a major portion of earth's water circulatory system known as hydrological cycle and occurs in permeable geologic formation known as aquifers i.e. formations having structure that can store and transmit water at rates fast enough to supply reasonable amounts to wells. Waste includes all the discarded solid materials from commercial, municipal, industrial and agricultural activities [1].

Groundwater pollution is mainly due to the process of industrialization and urbanization that has progressively developed over time without any regard for environmental consequences. In recent times, the impact of leachate on groundwater and other water resources has attracted a lot of attention because of its overwhelming environmental significance. Leachate migration from wastes sites or landfills and the release of pollutants from sediments (under certain conditions) pose a high risk to groundwater resource if not adequately managed. Open dumps are the oldest and most common way of disposing off solid wastes, although in recent years, thousands have been closed, many are still being used. Waste management has become increasingly complex due to the increase in human population, industrial and technological

revolutions and the processes that control the fate of wastes in the soil is complex and many of them are poorly understood. Issues such as nutrients release rate and other chemicals, leaching of nutrients, metals through macro pores as suspended solids and sludge organic matter on the sorption degradation are often not understood by many. Leaching of hydrophobic organics and long term bioavailability and fate of metals fixed by soil organic matter needed to be studied to have a better approach in handling groundwater pollution. Toxic chemicals that have high concentration of nitrate and derived from waste in the soil can filter through a dump and contaminate both ground and surface water. Insects, rodents, snakes and scavenger birds, dust, noise, bad odour are some of the aesthetic problems associated with sanitary landfill [2].

The volume of solid waste generated in Belgaum City, Karnataka has increased significantly over time from an estimated quantity 58400 tons per year (160 tons/day) in 2009-10 to 65700 tons per year (180 tons/day) in 2012 [3]. Because of increase in population, industrial and economic development. The total assessment revealed that about 75% total waste is organic in nature, 23% of plastic, nylon and 2% metal. Increasing waste generation and disposal resulted in increase groundwater pollution. To what

extent this pollution has affected the water wells in the area is unknown and hence needed to be determined. The objective of the study therefore was to assess the effect of landfill pollution on groundwater quality in Belgaum, Karnataka.



Fig 1.1: Turmuri Landfill Site Belgaum

2. Materials and methodology

A. Study Area

Turmuri landfill site is located at 13km to the west of Belgaum City of Karnataka. It ranges between latitude 16.157 N and longitude 74.77 E. Belgaum has a tropical climate with maximum temperature of 39°C in summer, the winters are colder with temp 12°C and heavy monsoon ranges from June to October.

The landfill site spread across 66 acres of land having elevation of 585m. The Belgaum City Corporation disposes nearly 180 tons of garbage every day. However due to increase in population every year nearly 5 percent of garbage is piled on. Nearly 5000 people residing on the surrounding of Turmuri site. Within 1000 m of landfill area have 150 open wells including bore holes. Due to improper maintenance of landfill area the surrounding bore holes have been contaminated.

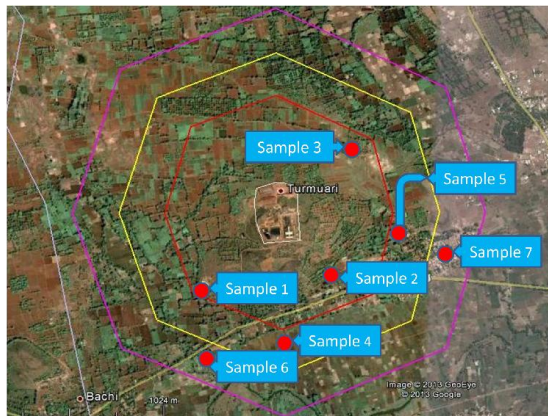


Fig. 2.1: Samples collected from site

B. Field sampling and water analysis

The study area having many open wells including bore wells within 1000m around the landfill site. Three bore well samples S1, S2, S3 were collected within 500 m, two bore well samples S4, S5 were collected between 500 – 750 m and two bore well samples S6, S7 were collected within range of 750 – 1000m away from landfill site. Samples were

collected and analysed for different parameters at different time intervals.

The most suitable bottles to use are made from polyethylene or glass. All samples should be properly labelled with details of the source, date of sampling, time of sampling and address. Sample containers for bacteriological examinations must be of glass and sterilized before use by heating for sometime at 180°C together with their stoppers. The samples should be tested in laboratory within 24 hours from the time of collection [10]. The analyses covered physical, chemical and bacteriological parameters of water samples from each bore well. The qualitative analyses were carried out at the Chemical analysis laboratory. The samples were analysed for pH, total dissolved solids (TDS), total hardness, nitrate (NO₃) were carried out in the water laboratory using standard methods for the examination of water [10]. The concentrations of heavy metal such as Lead in water samples were determined with flame atomic absorption spectrophotometer. Also, bacteriological assay was used in the determination of Escherichia Coli bacteria. All the results were compared with the World Health Organization (WHO) and Bureau of Indian Standards for drinking water.

3 RESULTS AND DISCUSSIONS

A.

1) pH

TABLE 3.1: Average pH values of water samples from the month Feb-May

Month	Samples							As per BIS standards
	S1	S2	S3	S4	S5	S6	S7	
Feb	6.0	6.34	7.31	6.28	6.2	6.02	7.3	DL - 6.5 PL - 8.5
Mar	6.3	6.24	7.4	6.54	6.82	6.35	7.4	
Apr	6.5	6.54	8.04	6.56	6.8	6.47	7.5	
May	7.2	6.9	7.64	6.96	7.3	6.9	7.5	

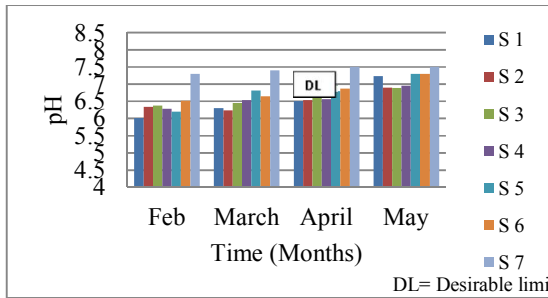


Fig.3.1: Average pH values of water sample

From the above graph it is evident that except for the well S6 and S7, all other well water samples were acidic in nature for the month of Feb and March, But in the month of Apr and May all the wells were within the prescribed levels of BIS and WHO. It can also be inferred from the graph that the pH of water sample for wells lying in the radius of 500 and 750 m were acidic in nature for the month of Feb and March. It can be concluded that the pH of water in wells within 500 and 750 m are contaminated by leachate of Landfill.

2) Hardness

TABLE 3.2: Average Total Hardness values of water samples from the month Feb-May

Month	Samples							As per BIS standards
	S1	S2	S3	S4	S5	S6	S7	
Feb	48	42	65	46	53	53	79	DL - 300 PL - 600
Mar	46	55	64	80	57	50	70	
Apr	38	54	56	36	44	38	51	
May	20	58	36	29	20	25	25	

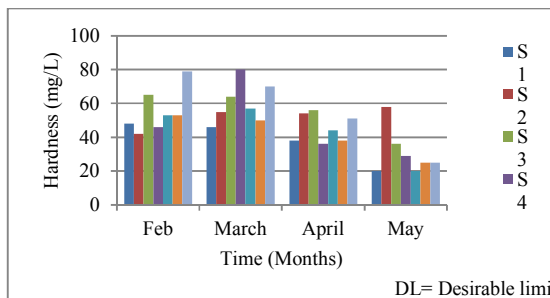


Fig 3.2: Average Total Hardness values of water sample

From the above graph it is evident that the hardness of all water samples from the well were within the desirable limits. The hardness of water samples of all the wells were within the prescribed levels of BIS standards for the month of Feb – May. It can also be concluded that all the well water samples were soft water. From the above graph it can also be concluded that the

hardness of water gradually decreases in summer seasons.

Nitrates

TABLE 3.3: Average Nitrates values of water samples from the month Feb-May

Month	Samples							As per BIS standards
	S1	S2	S3	S4	S5	S6	S7	
Feb	61.3	60.2	61.8	4.6	6.8	57.5	47.4	DL - 45 PL - 100
Mar	61.5	63.8	61.5	6.8	5.0	64.7	51.3	
Apr	59.1	64.8	58.8	19.8	9.8	68.9	71.1	
May	36.6	51.2	36.6	19.8	9.8	45.8	43.5	

From the above graph it is evident that all the well water samples lying within 1000 m from landfill site were contaminated with nitrate concentration above the desirable limits of BIS standards in summer season i.e. Feb – May except S4 and S5. The well water samples S4 and S5 which are lying in the radius of 500 – 750m contain nitrate concentration below the desirable limits. It can also be concluded that all the well water samples lying within the range of 500m contains nitrate concentration above the prescribed BIS limits and WHO standards due to contamination of the leachate.

4) Total Dissolved Solids

TABLE 3.4: Average TDS values of water samples from the month Feb-May

Month	Samples							As per BIS standards
	S1	S2	S3	S4	S5	S6	S7	
Feb	61	79	185	72	88	76	148	DL-500 PL- 2000
Mar	65	72	178	142	84	85	171	
Apr	63	82	161	63	73	63	142	
May	65	90	155	90	72	65	130	

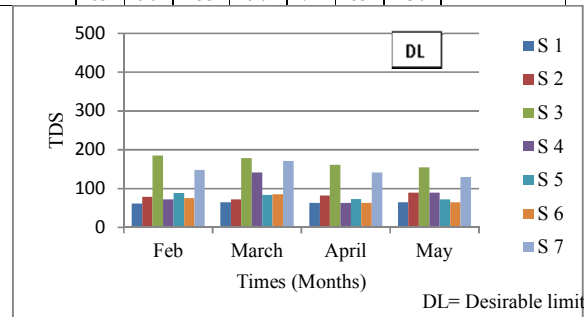


Fig 3.4: Average TDS values of water sample

5) Lead

TABLE 3.5: Average Lead values of water samples from the month Feb-May

Month	Samples							As per BIS standards
	S1	S2	S3	S4	S5	S6	S7	
Feb	0.004	N D	0.002	0.0028	N D	N D	N D	DL - 0.05
March	0.0033	N D	0.0004	0.0005	N D	N D	N D	
April	0.0004	N D	0.0003	0.0004	N D	N D	N D	
May	0.0001	N D	0.0001	0.0002	N D	N D	N D	

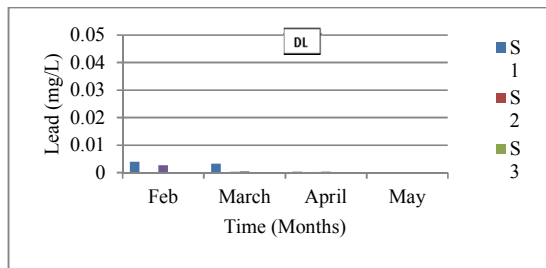


Fig 3.5: Average Lead values of water sample

From the above graph it is evident that all the well water samples lying within 1000 m from landfill area were having lead concentration within the prescribed limits of BIS and WHO standards. It can also be concluded that the surrounding well water of study area were not contaminated with lead metal.

6) MPN

TABLE 3.6: Average MPN values of water samples from the month Feb-May

Month	Samples							As per BIS standards
	S1	S2	S3	S4	S5	S6	S7	
Feb	1600	50	300	300	17	9	13	DL - 1/100ml
Mar	1600	60	360	110	14	4	14	
Apr	1600	110	300	260	11	16	13	
May	1600	1600	300	340	14	13	11	

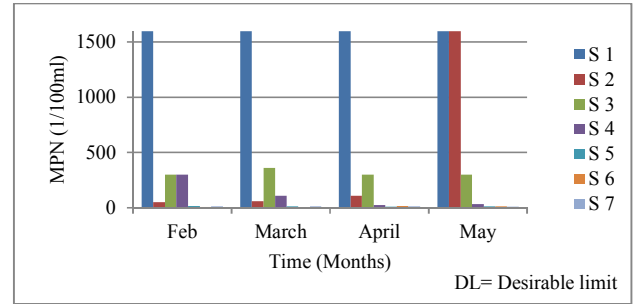


Fig 3.6: Average MPN values of water sample

From the above graph it is evident that the well water samples lying within the 500 m from landfill area were contaminated with E-Coli bacteria as it exceeds the prescribed limits of BIS and WHO standards. Among all the wells S1, S2 and S3 are highly contaminated, where as the wells S4, S5, S6 and S7 were within the prescribed limits of BIS and WHO standard. S – Sample, ND – Not Detected

5 CONCLUSIONS

From the results of the study, the following conclusions can be drawn

- 1) Except S6 and S7 all the wells i.e. (S1, S2, S3, S4 and S5) were acidic in nature for the month of Feb – March. Further in the month of April and May all the wells were within the prescribed levels of BIS.
- 2) During the study period it was observed that, the hardness of water samples of all the wells were within the prescribed levels of BIS.
- 3) During the study period it was observed that TDS of all the wells were within the prescribed limits of BIS and WHO standards.
- 4) During the study period it was observed that Lead (Pb) of all the wells were within the prescribed limits of BIS and WHO standards.
- 5) It was also observed that the wells lying within the 500m, from the landfill area were contaminated with E-Coli bacteria, where as the wells within the 500 – 1000m were within the prescribed limits of BIS and WHO standards.
- 6) The above result indicates very poor sanitation and damaging effects to health of both man and animals if surrounding well waters were used for domestic purpose.
- 7) From the study, it can be recommended that re-designing of sanitary landfill with clay or plastic liners to prevent leachate from getting to water table, adoption of clean technology for recycling greenhouse gases emanating from the landfill and a sustainable land management programmed for reclamation insisted.

REFERENCES

- [1] Afolayan O.S., Ogundele F.O. and Ayo Omotayo, "comparative analysis of the effect of closed and operational landfills on groundwater quality in solous, Lagos, Nigeria", *Journal of applied technology in environmental sanitation*, vol 2(1), pp. 67-76, 2012.
- [2] Christopher O. Akinbile, MohdSuffian Yusoff, "Assessment of Groundwater Quality near a Municipal Landfill in Akure, Nigeria", 2nd International Conference on Environmental Science and Technology, IPCBEE, vol.6, pp. 83-87, 2011.
- [3] Solid Waste Management Information, City Corporation Belgaum, Karnataka, India. Reading at: http://belgaumcity.gov.in/sites/belgaumcity.gov.in/files/pdfs/SWM%20information_300312.pdf
- [4] Longe E.O. and Balogun M.R., "Groundwater Quality Assessment near a Municipal Landfill, Lagos, Nigeria", *Research Journal of Applied Sciences Engineering and Technology* Vol 2(1), pp. 39-44, 2010.
- [5] Mohd Raihan Taha, Wan Zuhairi Wan Yaacob, Abd RahimSamsudin and Jasni Yaakob, "Groundwater quality at two landfill sites in Selangor", *Malaysia Bulletin of the Geological Society of Malaysia*, vol 57, pp. 13 – 18, 2011.
- [6] Bharat Jhamnani and SK Singh, "Groundwater Contamination due to Bhalaswa Landfill Site in New Delhi", *International Journal of Civil and Environmental Engineering*, vol 1(3), pp. 121-125, 2009.
- [7] Esmail Al Sabahi, S. Abdul Rahim, W.Y. Wan Zuhairi, Fadhl Al Nozaily and Fares Alshaebi, "Leachate and Groundwater Pollution at Municipal Solid Waste Landfill of Ibb City, Yemen", *American Journal of Environmental Sciences*, vol 5(3), pp. 256-266, 2009.
- [8] Adekunle M., Adetunji M. T., A. M. Gbadebo and O. B. Banjoko, "Assessment of Groundwater Quality in a Typical Rural Settlement in Southwest Nigeria", *International Journal of Environmental Research and Public Health*, Vol 4(4), pp 307-318, 2007.
- [9] Navaraj P.S. and Krishnammal S., "Evaluation of water quality and its quotient factor in Therkutheru village, Madurai, India", *Journal of Environmental Science and Water Resources* Vol. 1(9), pp. 216 – 222, 2012.
- [10] IS Standards:2490–1974, 3360–1974, 3307 – 1974, *Environment Engineering Laboratory manual*. Reading at: http://www.vtu.ac.in/index.php?option=com_content&article=&id=345&itemid=88
- [11] "Standard Methods for the Examination of Water and Wastewater", American Public Health Association (APHA), American Water Works Association (AWWA), Water Pollution Control Federation (WPCF). 16th edition, American Public Health Association, Washington, DC., U.S.A.
- [12] Gopalan.R. and Amritha Anand, "A laboratory manual for Environmental Chemistry", I.K. International publishing house Pvt. Ltd, New Delhi, 2009.